
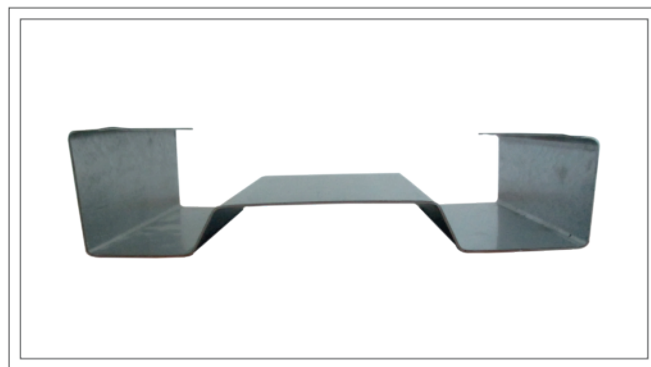


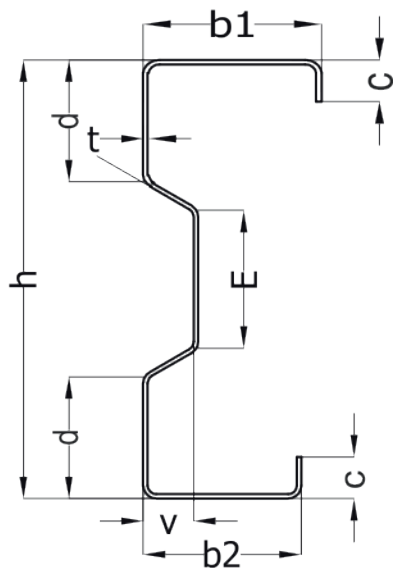

Calitate material S350GD + Z275. La cerere, profilele se pot realiza si din alte tipuri de materiale.

Dimensiuni secționale – profile Σ

Profil de tip Σ		DIMENSIUNI SECȚIONALE								
		h (mm)	b ₁ (mm)	b ₂ (mm)	d (mm)	E (mm)	c (mm)	v (mm)	t (mm)	G (kg/m)
$\Sigma 200$	$\Sigma 200 - 1.5$	200	52	45	56	63.2	21.0	23	1.5	4.11
	$\Sigma 200 - 2.0$	200	52	45	56	63.8	21.0	23	2.0	5.43
	$\Sigma 200 - 2.5$	200	52	45	56	64.3	21.0	23	2.5	6.75
	$\Sigma 200 - 3.0$	200	52	45	56	65.1	21.0	23	3.0	8.01
$\Sigma 250$	$\Sigma 250 - 1.5$	250	72	65	56	113.2	22.6	23	1.5	5.20
	$\Sigma 250 - 2.0$	250	72	65	56	113.8	23.8	23	2.0	6.94
	$\Sigma 250 - 2.5$	250	72	65	56	114.3	25.0	23	2.5	8.67
	$\Sigma 250 - 3.0$	250	72	65	56	115.1	25.0	23	3.0	10.31
$\Sigma 300$	$\Sigma 300 - 1.5$	300	88	81	56	163.2	24.0	23	1.5	6.21
	$\Sigma 300 - 2.0$	300	88	81	56	163.8	25.0	23	2.0	8.26
	$\Sigma 300 - 2.5$	300	88	81	56	164.3	25.0	23	2.5	10.28
	$\Sigma 300 - 3.0$	300	88	81	56	165.1	25.0	23	3.0	12.25
$\Sigma 350$	$\Sigma 350 - 1.5$	350	100	93	56	213.2	24.0	23	1.5	6.08
	$\Sigma 350 - 2.0$	350	100	93	56	213.8	25.0	23	2.0	9.37
	$\Sigma 350 - 2.5$	350	100	93	56	214.3	25.0	23	2.5	11.70
	$\Sigma 350 - 3.0$	350	100	93	56	215.1	25.0	23	3.0	13.99
$\Sigma 400$	$\Sigma 400 - 2.0$	400	100	93	56	263.8	25.0	23	2.0	9.26
	$\Sigma 400 - 2.5$	400	100	93	56	264.3	25.0	23	2.5	12.68
	$\Sigma 400 - 3.0$	400	100	93	56	265.1	25.0	23	3.0	15.17

*Societatea își rezervă dreptul de a aduce propriei producții modificările și îmbunătățirile pe care le consideră necesare, în orice moment, fără o consultare prealabilă.